

TB-515 Series Pitch 5mm

Features

- Disconnectable two-piece construction simplifies field maintenance
- Choice of parallel or perpendicular wiring
- Shrouded pin header protects pins from physical or chemical damage



Housing

- Body Material: Thermoplastic (UL 94V-0), Green
- Clamp: Nickel plated phosphor bronze
- Wire Cage: Nickel plated brass
- Wire Range AWG: 12-16 STR
- Screws: Zinc plated steel
- Available in Multi Poles: From 2 thru 24
- Rating: 10 amperes, 300VAC
- Insulation withstands voltage AC 2000V/min
- Insulation resistance 500M Ω or more at DC 500V


Base

- Body Material: Thermoplastic (UL 94V-0), Green
- Terminal Pins: Tin plated brass
- Available in multi Poles: From 2 thru 24
- Choice of right angle or vertical

TB-515H

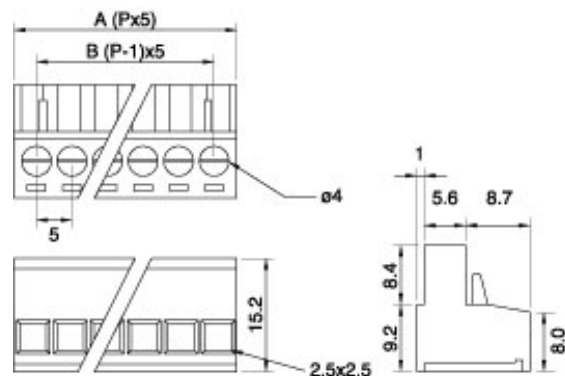
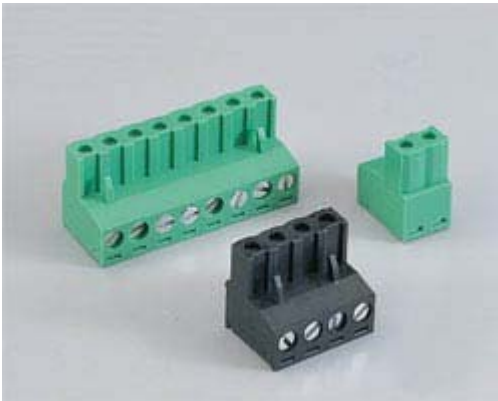


TB-515V


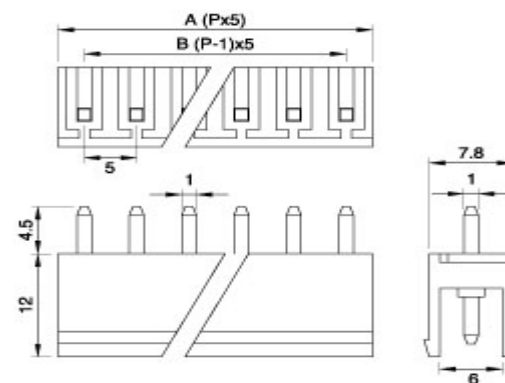


TB-515 Series Pitch 5mm

TB-515R

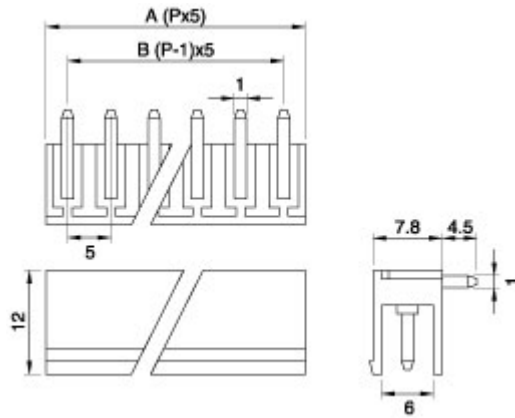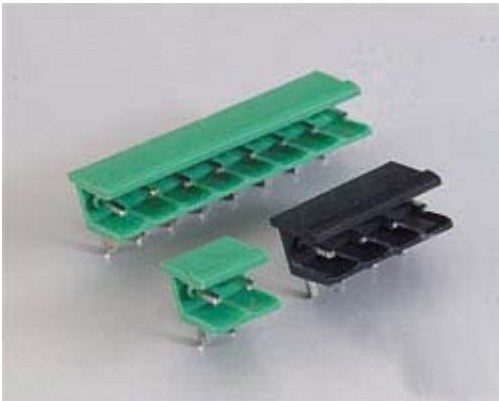

TB-515RC

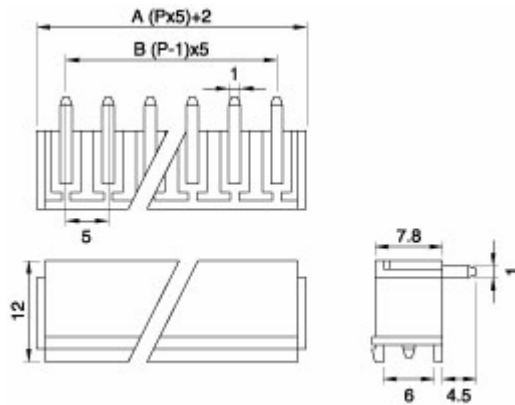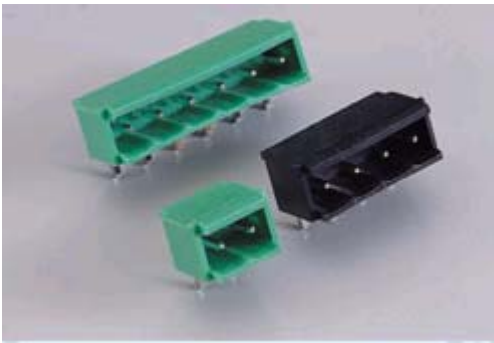

TB-515VC

