

TBT-50 Series Pitch 10mm


Features

- Supply 2P, 3P can be dovetailed together to make any length & different combinations


Specifications

- Body Material: Thermoplastic (UL 94V-0), Green
- Terminals: Tin plated brass
- Screws: Zinc plated steel
- Wire Range AWG:
 - 16-22 STR (MTBKT-501, 502, 503, 505, 506R, 506L)
 - 14-18 STR (MTBKT-504)
- Rating: 10 amperes, 300VAC
- Insulation withstands voltage AC 2000V/MIN
- Insulation resistance 500MΩ or more at DC 500V
- Available in multi-poles from 2 thru 28

TBT-501-10

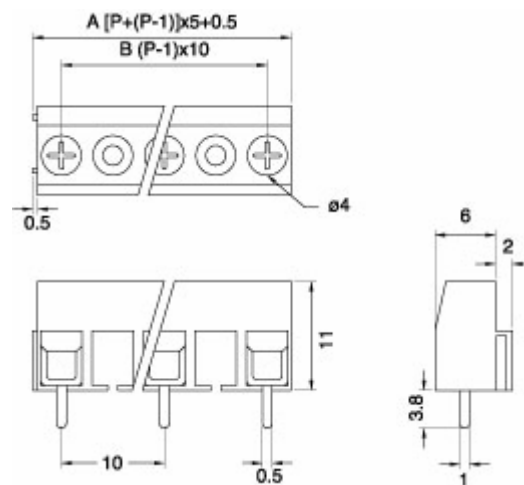

TBT-502-10

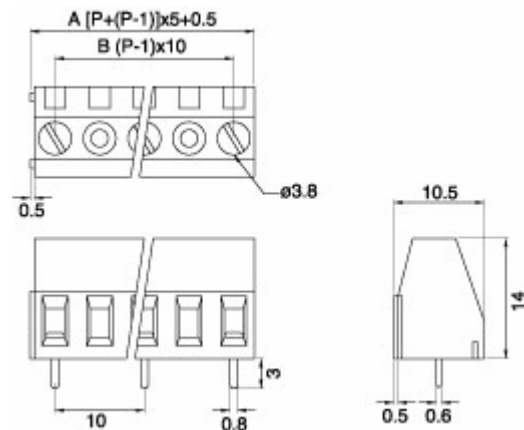

TBT-50 Series Pitch 10mm

TBT-504-10

