


WEEKLY PROGRAMMABLE ELECTRONIC TIMER

MODEL: PET-012 Ni-MH battery included




CONTROL OUTPUTS & CONNECTIONS



* Terminal 3 And 4 Can Be External with Switch. When You Need Timer To Be Turned On At any Time. You Can Turn On The Switch. If You Want To Resume The Pre-Setting Function, You Have To Turn OFF The Switch Of Terminal 3 And 4.

DIMENSION : UNIT m/m

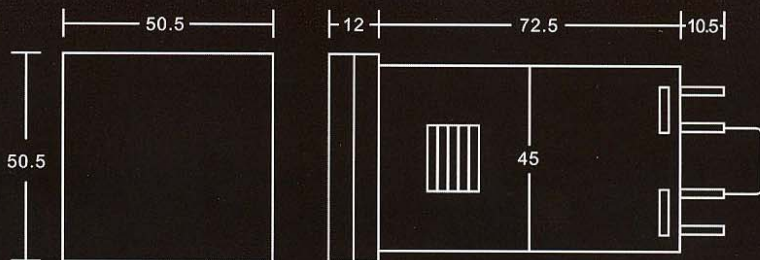

SPECIFICATIONS:

Input Voltage	AC 110~120V 50/60Mz	AC 220~240V 50/60Mz	DC 24V
Resistive Load	5 Amp 600 Watt	5 Amp 1000 Watt	5 Amp

MOUNTING HOLE:

45 ± 0.6 m/m X 45 ± 0.6 m/m

PROGRAMMABLE DIGITAL ELECTRONIC TIMER



DIMENSION: L 15.6cm x W 8.3cm x D 7.3cm

MODEL	RATED VOLTAGE	FULL TIMING RANGE	RATED CONTROL CAPACITY	RESETTING SYSTEM	RESETTING TIME
PET-900TB	AC 110~120V (50/60Hz)	9999 S 9999 M 9999 H	AC 110~120V 15Amp AC 220~240V 10Amp	B TYPE: MANUAL RESET	0.1 Second max.
PET-901TB		99.99S 99M59S 99H99M	AC 110~120V 15Amp AC 220~240V 10Amp		
PET-902TB		99S → 99S 99M → 99M 99H → 99H ON OFF	AC 110~120V 15Amp AC 220~240V 10Amp		

MEGATONE ELECTRONICS CORP.
6F, 19, SEC.2, MIN CHUAN EAST RD., TAIPEI, TAIWAN
P.O.Box 55-775

TEL:886-2-25910821 (REP.)
FAX:886-2-25931849 / 25935568
E-mail:orders@MegatoneCorp.com
<http://www.MegatoneCorp.com>