

PROGRAMMABLE DIGITAL ELECTRONIC TIMER

- Easy operation
- Memory With "EE PROM" IC Control
- Lock Function
- LCD With Back Light

MULTI RANGE TIMER

MULTI RANGE TIMER

MULTI RANGE TWIN TIMER



MODEL


PET-900A
PET-900B

PET-901A
PET-901B

PET-902A
PET-902B

RATED VOLTAGE	AC 110~120V 50/60Hz, DC12V AC 220~240V 50/60Hz, DC24V	AC 110~120V 50/60Hz, DC12V AC 220~240V 50/60Hz, DC24V	AC 110~120V 50/60Hz, DC12V AC 220~240V 50/60Hz, DC24V
FULL TIMING RANGE	9999S, 9999M, 9999H	99.99S, 99M59S, 99H59M	
RATED CONTROL CAPACITY	NO: 13A NC: 10A	NO: 13A NC: 10A	NO: 13A NC: 10A
LIFE	MECHANICAL: 5×10^6 times ELECTRICAL: 10^5 times	MECHANICAL: 5×10^6 times ELECTRICAL: 10^5 times	MECHANICAL: 5×10^6 times ELECTRICAL: 10^5 times
RESETTING SYSTEM	A TYPE: POWER RESET B TYPE: MANUAL RESET	A TYPE: POWER RESET B TYPE: MANUAL RESET	A TYPE: POWER RESET B TYPE: MANUAL RESET
RESETTING TIME	0.1 Second max.	0.1 Second max.	0.1 Second max.
OPERATING AMBIENT TEMPERATURE	-10°C ~ 50°C	-10°C ~ 50°C	-10°C ~ 50°C

DIMENSION: UNIT m/m

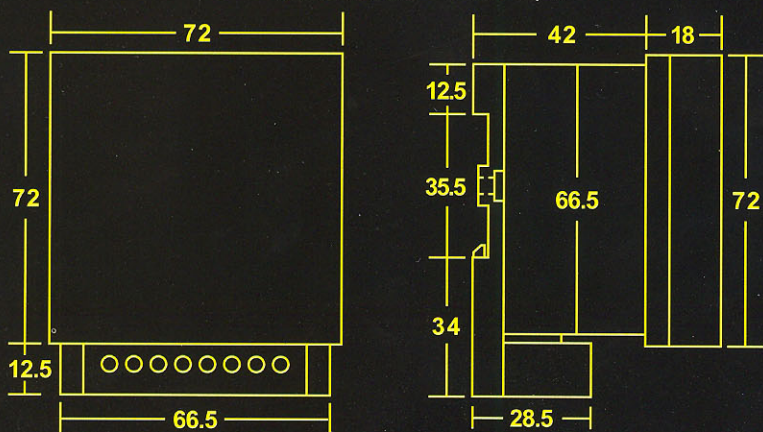

CONTROL OUTPUTS & CONNECTIONS

