



Features:

- Sealed with built-in oscillating circuit for wave soldering and washing

How to order:


MBZ-	12	01	N	-	B	1	W
	(1)	(2)	(3)		(4)	(5)	(6)
<p>(1) Diameter for the buzzer</p> <p>(2) For the rated voltage Ex. 1.5V numbering by 01; 3.0V numbering by 03</p> <p>(3) Serial number for various types A,B,K: for the external drive with sealed type C,D,F: for the internal drive with sealed type G,H,J: for the external drive without sealed type R,N: for the side emission hole design M: for the bigger emission hold Y: for the aside emission hold on the top of buzzer S,T: for the type of SMD buzzer</p> <p>(4) Numbering for various spec. of frequency, impedance & material</p> <p>(5) Numbering for various spec. marketing or leads length</p> <p>(6) For Wire type only (No number for pin type)</p>							

	MBZ-1201C-A2	MBZ-1206C-A2	MBZ-1212C-A2
RATED VOLTAGE	1.5 VDC	6 VDC	12 VDC
OPERATING VOLTAGE	1.2~3V	3~8V	8~16V
*RATED CURRENT	Max. 20mA	Max. 30mA	Max. 30mA
*SOUND PRESSURE LEVEL AT 10CM	Min. 75dB	Min. 85 dB	Min. 85dB
*FREQUENCY OF OUTPUT SIGNAL	2,300Hz±400Hz	2,300Hz±300Hz	2,300Hz±300Hz
OPERATING TEMP. RANGE	-20°C to +70°C	-20°C to +70°C	-30°C to +80°C
STORAGE TEMP. RANGE	-30°C to +80°C	-30°C to +80°C	-30°C to +80°C
WEIGHT	2gms	2gms	2gms

Megatone Electronics Corp.

Tel: +886-2-2951-0821 / Fax: +886-2-2593-1849

Email: orders@MegatoneCorp.com / mega.powe@msa.hinet.net

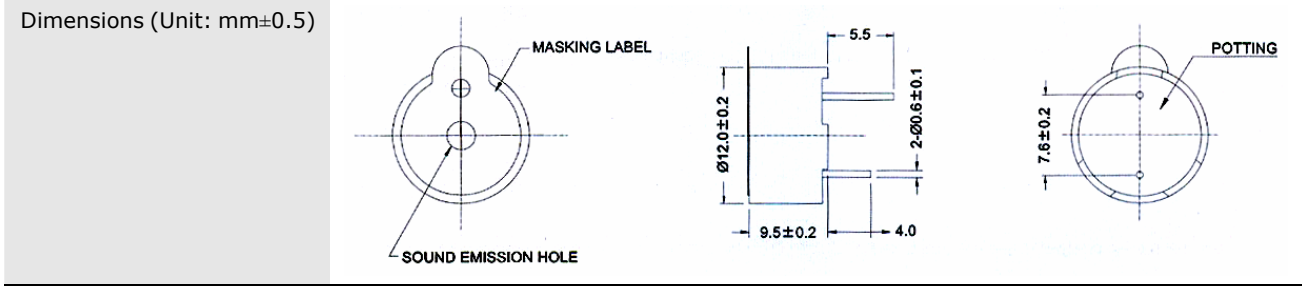

* Value applying rated voltage (DC)