


FEF Core

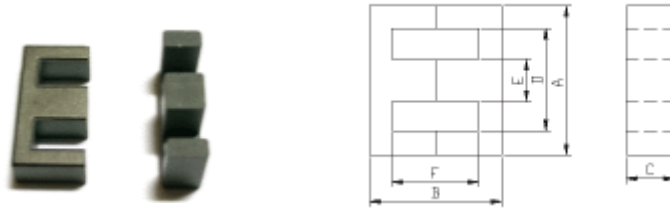

Type	DIMENSION (unit: mm)					
	A	B	C	D	E	F
FEF12.6	12.6±0.5	13.0+0/-0.4	3.7+0/-0.3	8.90min	3.7+0/-0.3	9.0+0.6/-0
FEF16/16	16.1±0.4	16.1±0.3	4.5±0.2	11.7±0.3	4.55±0.15	11.8±0.3
FEF20/20	20.0±0.4	19.9±0.4	5.7±0.2	14.5±0.4	5.7±0.2	14.4±0.4
FEF25/25	25.0±0.5	25.1±0.5	7.2±0.3	17.9±0.3	7.25±0.25	17.9±0.5
FEF30/30	30.0±0.7	31.0+0/-0.8	7.3+0/-0.5	20.0min	7.2+0/-0.5	20+0.8/-0.4
FEF32/32	32+0.7/-0.5	32.6±0.6	11+0/-0.7	23.6±0.5	9.5+0/-0.5	23.4±0.4
FEF32/32A	32+0.9/-0.7	32.6±0.6	9.5+0/-0.7	23.6±0.5	9.5+0/-0.6	23.4±0.4

Core set parameter and electrical characteristics

AL-Value(nH/N²):1KHz,0.25V,100Ts,25±3°C

Type	Le (mm)	Ae (mm ²)	Cl (mm ⁻¹)	Ve (mm ³)	Material				
					JPP-3	JPP-4	JPH-5	JPH-7	JPH-10
FEF12.6	29.7	12.4	2.4	368.3	840	770	1350	1550	2600
FEF16/16	37.7	19.5	1.9	735.2	1100	1000	2000	2400	3550
FEF20/20	46.1	32.2	1.4	1484.4	1600	1500	2800	3350	4850
FEF25/25	57.8	41.8	1.1	2994	2100	1900	4000	4550	6500
FEF30/30	65.4	60.0	1.1	3924	2000	1850			
FEF32/32	74.0	97.0	0.76	7178	3150	2900			
FEF32/32A						2900			