


FRM Cores

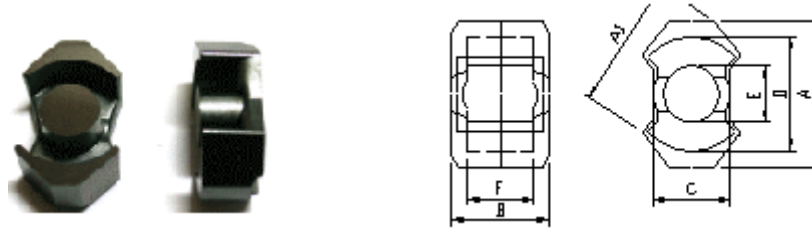

Type	DIMENSION (unit: mm)						
	A	A1	B	C	D	E	F
FRM4	10.75±0.25	9.6±0.2	10.4±0.1	4.5±0.1	8.15±0.2	3.8±0.1	7.2±0.2
FRM5	14.3±0.3	12.05±0.25	10.4±0.1	6.6±0.2	10.4±0.2	4.8±0.1	6.5±0.2
FRM6	17.6±0.3	14.4±0.3	12.4±0.1	8.0±0.2	12.65±0.25	6.3±0.1	8.2±0.2
FRM8	22.75±0.45	19.3±0.4	16.4±0.1	10.8±0.2	17.3±0.3	8.4±0.15	11.0±0.2
FRM10	27.85±0.65	24.15±0.55	18.6±0.1	13.25±0.25	21.65±0.45	10.7±0.2	12.7±0.3
FRM12	36.7±0.65	29.25±0.55	24.5±0.1	15.85±0.25	25.5±0.5	12.6±0.2	17.1±0.3
FRM14	41.5±0.7	34.1±0.6	30.1±0.1	18.7±0.3	29.6±0.6	14.7±0.3	21.1±0.3

Material

CORE SET PARAMETERS AND ELECTRICAL CHARACTERISTICS

Type	Le (mm)	Ae (mm ²)	Cl (mm ⁻¹)	Ve (mm ³)	Material				
					JPP-3	JPP-4	JPH-5	JPH-7	JPH-10
					AL	AL	AL	AL	AL
FRM5	22.1	23.8	0.9	526		1920			7000
FRM6	28.6	36.6	0.8	1046		2300			9000
FRM8	38.0	64.0	0.6	2432		3160			13000
FRM10	44.0	98.0	0.4	4312		4030			16800