


## FUU Cores

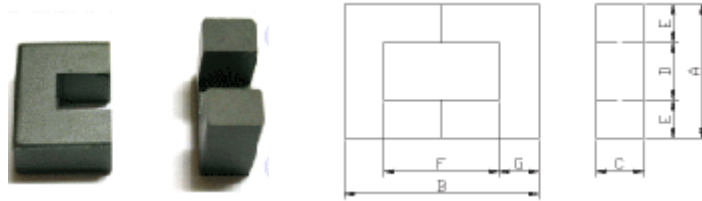

Type	DIMENSION (unit: mm)						
	A	B	C	D	E	F	G
FUU9.8	9.8±0.2	14.2±0.2	2.7±0.2	4.2±0.2	2.8±0.1	8.4±0.4	2.9±0.1
FUU10.5	10.5±0.3	15.8±0.4	5.0±0.3	5.5±0.3	2.5±0.2	10.8±0.4	2.5±0.2
FUU15/23	15.2±0.5	22.8±0.4	6.45±0.3	5.2±0.3	5.0±0.2	12.8±0.4	5.0±0.2
FUU16/20	16.0±0.3	20.0±0.4	6.0±0.15	6.85±0.2	4.57±0.2	12.0±0.3	4.0±0.15
FUU16/22	16.0±0.3	22.0±0.4	6.0±0.15	6.85±0.2	4.57±0.2	14.0±0.3	4.0±0.15
FUU25/37	24.5±0.7	36.8±1.0	7.3±0.3	9.9±0.3	7.3±0.3	21.7±0.5	7.55±0.3

Core set parameter and electrical characteristics

AL-Value(nH/N<sup>2</sup>):1KHz,0.25V,100Ts,25±3°C

Type	Lc (mm)	Ac (mm <sup>2</sup> )	Cl (mm <sup>-1</sup> )	Ve (mm <sup>3</sup> )	Material				
					JPP-3	JPP-4	JPH-5	JPH-7	JPH-10
FUU9.8	34.1	7.65	4.46	260.87	520	480	930	1300	1600
FUU10.5	40.5	12.4	3.27	502.20	750	690	1220	1650	2400
FUU15/23	51.7	31.9	1.62	1649.2	1400	1300			
FUU16/20	51.2	25.6	2.0	1310.7	1080	1000			
FUU16/22	55.2	25.7	2.15	1418.6	1100	1000			
FUU25/37	-	-	-	-	-	1330	-	-	-