


### General Specification:

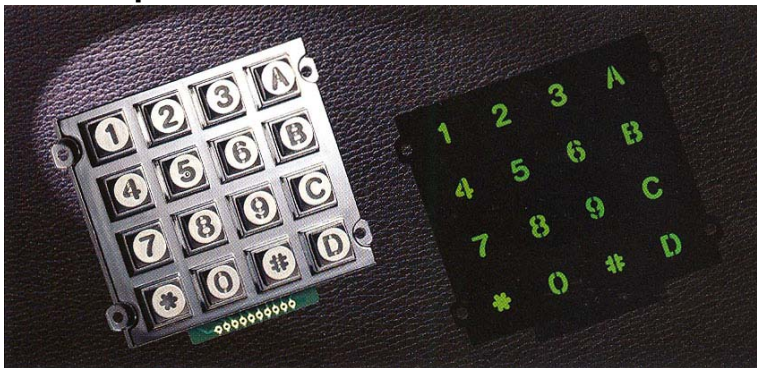

**KPD-1607-N-SSL-WP-MM**

- Contact rating: 20mA, 24VDC
- Contact resistance: 200ohm max
- Life: 1,000,000 cycles per key
- Operating Temperature: -20°C to +65°C
- Storage Temperature: -40°C to +65°C

### How to order:

KPD-	XXXX-	X-	XXX-	XX-	XX
	(1)	(2)	(3)(4)(5)	(6)	(7)
<p><b>(1)</b> Model Number: 101, 102, 103, 104, 207, 304, 304-FM, 507, 707, 804, 1604, 1607</p> <p><b>(2)</b> Legend (character) type:                      A - (Alpha-number legend)                      N - (Numeric legend)                      B - (Blank)                      AR - (Arrow)</p> <p><b>(3)</b> Bezel Color:                      W - white color                      B - Black color                      I - Ivory color                      S - Silver color for metal bezel</p> <p><b>(4)</b> Keytop color:                      W - white color                      B - black color                      G - gray color                      I - Ivory color                      S - silver color for metal keytop</p> <p><b>(5)</b> Legend (character) color:                      W - white color                      B - black color                      Y - yellow color                      L - LED lighting (backlighting)</p> <p><b>(6)</b> Water proof : WP</p> <p><b>(7)</b> Metal Bezel, Metal Keytop: MM</p>					

### Megatone Electronics Corp.

Tel: +886-2-2951-0821 / Fax: +886-2-2593-1849

Email: orders@MegatoneCorp.com / mega.powe@msa.hinet.net

## Dimensions:

