


General Specification:



KPD-1607-A-SSB-WP-MM

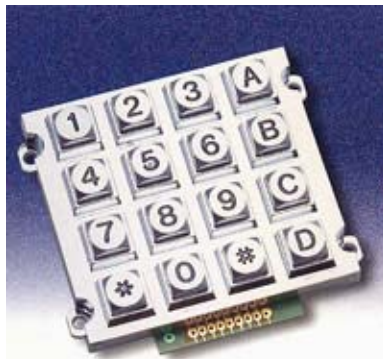

KPD-1607-N-SSB-WP-MM

- Contact rating: 20mA, 24VDC
- Contact resistance: 200ohm max
- Life: 1,000,000 cycles per key
- Operating Temperature: -20°C to +65°C
- Storage Temperature: -40°C to +65°C

How to order:




KPD-	XXXX-	X-	XXX-	XX-	XX
	(1)	(2)	(3)(4)(5)	(6)	(7)
<p>(1) Model Number: 101, 102, 103, 104, 207, 304, 304-FM, 507, 707, 804, 1604, 1607</p> <p>(2) Legend (character) type: A – (Alpha-number legend) N – (Numeric legend) B – (Blank) AR – (Arrow)</p> <p>(3) Bezel Color: W – white color B – Black color I – Ivory color S – Silver color for metal bezel</p> <p>(4) Keytop color: W – white color B – black color G – gray color I – Ivory color S – silver color for metal keytop</p> <p>(5) Legend (character) color: W – white color B – black color Y – yellow color L – LED lighting (backlighting)</p> <p>(6) Water proof : WP</p> <p>(7) Metal Bezel, Metal Keytop: MM</p>					

Megatone Electronics Corp.

Tel: +886-2-2951-0821 / Fax: +886-2-2593-1849

Email: orders@MegatoneCorp.com / mega.powe@msa.hinet.net

Dimensions:

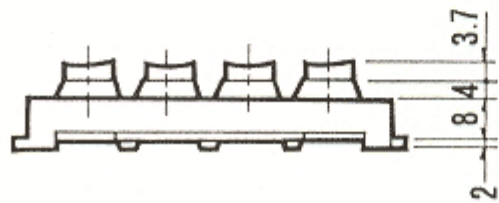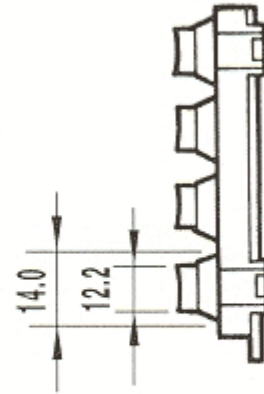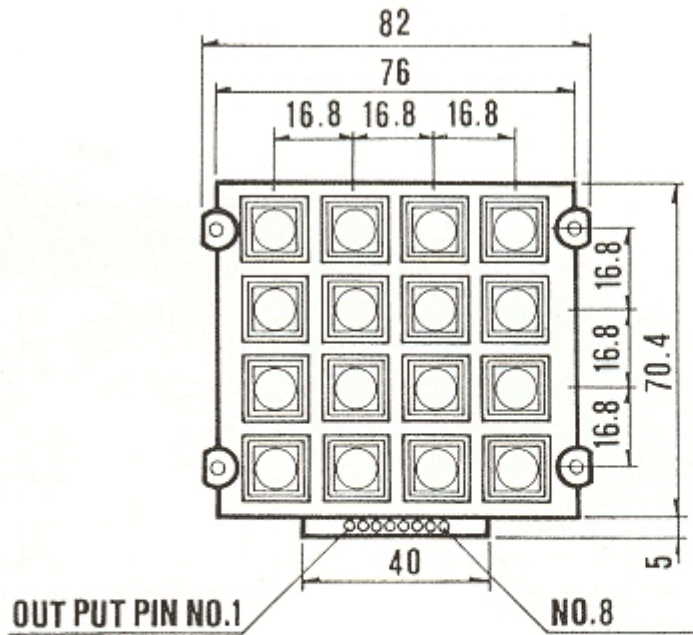

ACTUATING FORCE: 120 ± 30 GRAMS.
STROKE: 2.0 ± 0.5 mm.