

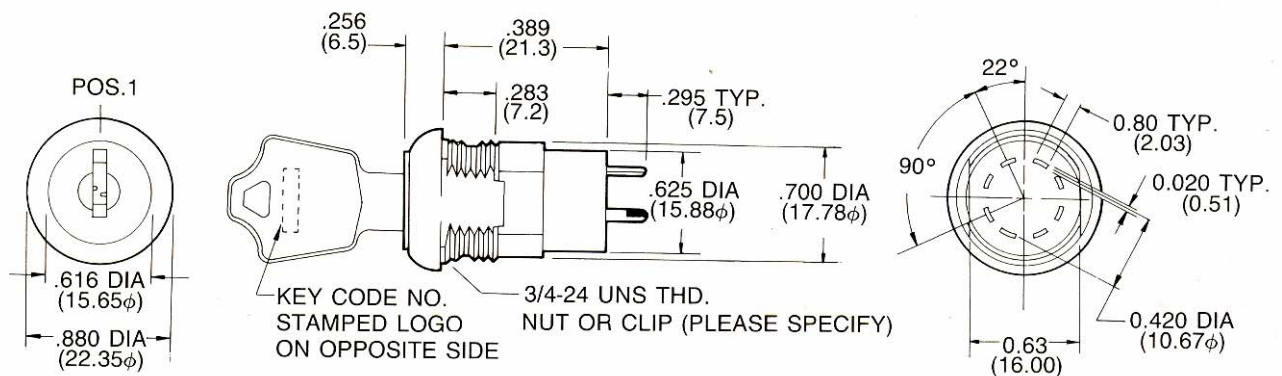
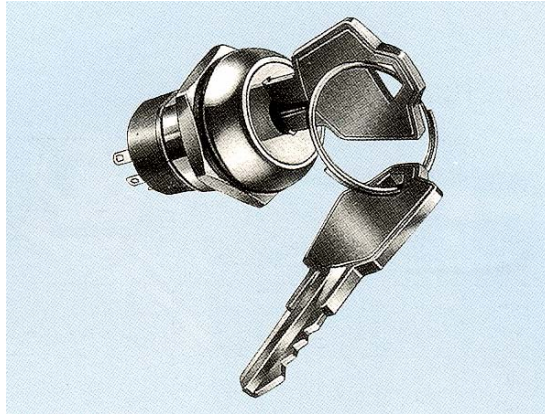



LKS216



TERMINAL (BOTTOM VIEW)

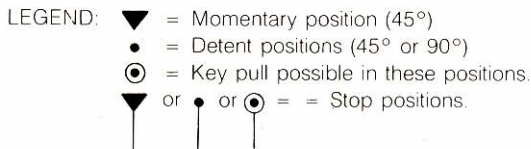

Specifications:

- Contact Rating: 4A@ 125VAC/28VDC, 2A@ 250VAC.
- Contact Resistance: below 10 milli-Ohms
- Insulation Resistance: 10⁹ Ohms Min.
- Dielectric Strength: 1kv rms min @ seal level.
- Electrical Life: 10,000 make-and-break cycles at full load.
- Anti-static models exceed 20kv DC static resistance also available.

Materials:

- Lock: bright nickel plated zinc alloy with nickel facing. (Black & polished chrome also available)
- Tumbler Mechanism: 4-disc tumbler cylinder.
- Keys: brass with code no.
- Contacts: silver plated cu (Q contact material) *
- Terminals: silver plated cu (Q contact material) *
- Contact spring: piano wire.
- Mounting nut: nickel plated zinc alloy.

Megatone Electronics Corp.

Tel: +886-2-2951-0821 / Fax: +886-2-2593-1849

Email: orders@MegatoneCorp.com / mega.powe@msa.hinet.net