




Metallized Polyester Film Capacitor


ADM Type:

Plastic Case, Amp Insertion, Wire Leads

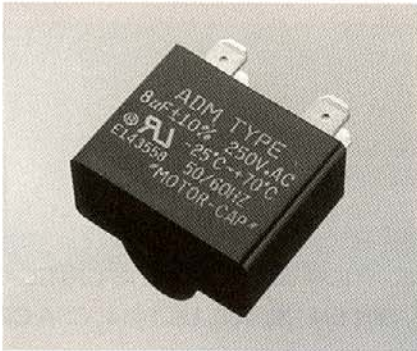

INTRODUCTION

1. HIGH STABILITY. NON-INDUCTIVE. SELF-HEALING CHARACTERISTICS.
2. MOLDED RECTANGULAR CASE OF BLACK POLYESTER-GLASS WHICH IS FLAME RETARDANT PER UL94V-0
3. THE EPOXY FILLING USED TO FILL THE ENCLOSURE AND PROTECT THE CAPACITOR IS FLAME RETARDANT, PER UL94V-0
4. ADM TYPE USED IN FANS, AIR-CONDITIONING, REFRIGERATION. OFFICE EQUIPMENT, MERCURY LAMP, FLUORESCENT LAMP AND BUSINESS MACHINES.

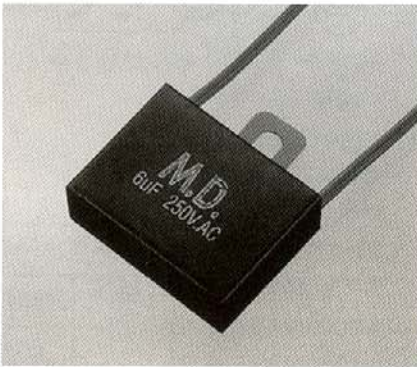

SPECIFICATION:

- | | |
|---------------------------|--------------------------------|
| 1. DIELECTRICS: | : POLYESTER FILM. |
| 2. COATING | : PLASTICS EPOXY RESIN SEALED. |
| 3. OPERATING TEMPERATURE | : -25°C ~ +70°C |
| 4. RANGE VOLTAGE | : 250, 330, 370, 440, 500VAC. |
| 5. CAPACITANCE | : 1.0uF~20uF. |
| 6. CAPACITANCE TOLERANCE | : +10%, -5%, ±5%, ±10%. |
| 9. OPERATING FREQUENCY | : 50, 60Hz |
| 10. TEST VOLTAGE | : R.V.X175% FOR 1 MINUTE. |
| 11. INSULATION RESISTANCE | : MORE THAN 1000MΩXuF. |
| 12. DISSIPATION FACTOR | : 0.35% MAX. AT 60 KHz 25°C |

CAP. uF	250VAC	330VAC	370VAC	440VAC	500VAC
1.0	A	A	A	E	E
1.5	A	A	A	E	J
2.0	A	E	E	E	J
2.5	A	E	E	J	L
3.0	A	E	E	J	L
4.0	E	J	J	N	N
5.0	E	L	L	P	P
6.0	E	N	N	P	
7.0	E	N	N	P	
7.5	G	N	N		
8.0	J	P	N		
10.0	L	R	R		
12.0	L	R	R		
12.5	N	R	R		
15.0	P	R	R		
16.0	P				
17.0	P				
18.0	P				
20.0	P				

UNIT:mm

CASE CODE	W	H	T	d
A	32.5	22.5	13.0	4.5
E	38.5	26.0	15.5	4.5
G	38.5	32.5	21.5	4.5
J	39.0	29.0	19.0	4.5
L	38.5	32.0	21.5	4.5
N	50.0	30.0	22.5	4.5
P	52.0	35.0	22.5	4.5
R	51.5	40.0	30.5	4.5