




Metallized Polyester Film Capacitor

Mini Size MEF Type:

Radial Dipped, Non-Inductive

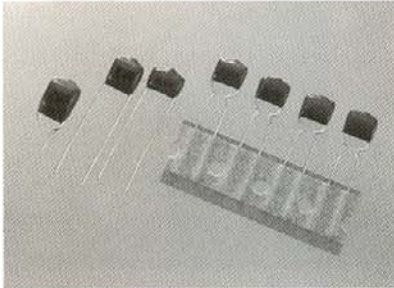


INTRODUCTION

- 1.HIGH STABILITY.
- 2.MINIATURE SIZE.
- 3.SELF-HEALING CHARACTERISTICS.
- 4.DIPPED EPOXY COATING PROTECTS FROM HUMIDITY.
- 5.EXCELLENT FOR USED IN COUPLING, BY-PASS, R.F.FILTERING, AND SOLID-STATE APPLICATION WHERE SIZE IS CRITICAL

SPECIFICATION:

- 1.OPERATING TEMPERATURE : -40°C ~ + 85°C
- 2.CAPACITANCE RANGE : 0.001~1.5uF
- 3.CAPACITANCE TOLERANCE : ±5%(J), ±10%(K), ±20%(M)
- 4.RATED VOLTAGE : 100VDC. 250VDC. 400VDC. 630VDC.
- 5.DISSIPATION FACTOR : 1.0%MAX AT 1KHz, 25°C
- 6.INSULATION RESISTANCE : >9000MΩ (C ≤ 0.33uF)
>3000MΩ / uF (C > 0.33uF) AT 25° C

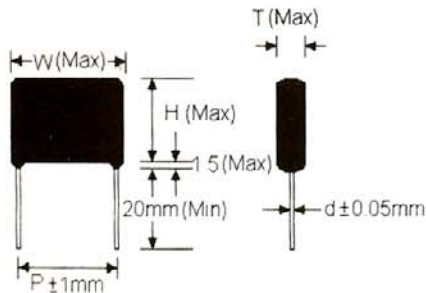

UNIT:mm

CAPACITANCE		2A(100VDC)					2E(250VDC)					2G(400VDC)					2J(630VDC)				
SYMBOL	uF	W	H	T	P	d	W	H	T	P	d	W	H	T	P	d	W	H	T	P	d
102	0.001	11.0	9.0	5.0	7.5	0.6	11.0	9.0	5.0	7.5	0.6	11.0	9.0	5.0	7.5	0.6	11.0	9.5	6.0	7.5	0.6
152	0.0015	11.0	9.0	5.0	7.5	0.6	11.0	9.0	5.0	7.5	0.6	11.0	9.5	5.5	7.5	0.6	11.0	10.0	6.5	7.5	0.6
222	0.0022	11.0	9.0	5.0	7.5	0.6	11.0	9.0	5.0	7.5	0.6	11.0	9.5	5.5	7.5	0.6	10.0	10.0	6.5	7.5	0.6
332	0.0033	11.0	9.5	5.5	7.5	0.6	11.0	9.5	5.5	7.5	0.6	11.0	9.5	6.0	7.5	0.6	11.0	10.5	7.0	7.5	0.6
472	0.0047	11.0	9.5	6.0	7.5	0.6	11.0	9.5	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.5	7.0	7.5	0.6
682	0.0068	11.0	9.5	6.0	7.5	0.6	10.0	9.5	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.5	7.0	7.5	0.6
103	0.01	11.0	10.0	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.5	7.0	7.5	0.6
153	0.015	11.0	10.0	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.5	7.0	7.5	0.6
223	0.022	11.0	10.0	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6	11.0	10.0	6.0	7.5	0.6					
333	0.033	11.0	10.0	6.0	7.5	0.6	11.0	10.5	6.0	7.5	0.6	11.0	10.5	6.5	7.5	0.6					
473	0.047	11.0	10.0	6.0	7.5	0.6	11.0	10.5	6.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6					
563	0.056	11.0	11.0	7.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6	11.0	11.5	7.5	7.5	0.6					
683	0.068	11.0	10.0	6.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6	11.0	11.5	7.5	7.5	0.6					
823	0.082	11.0	11.0	7.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6	11.0	11.5	7.5	7.5	0.6					
104	0.1	11.0	10.0	6.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6	11.0	12.0	8.0	7.5	0.6					
154	0.15	11.0	10.0	6.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6										
224	0.22	11.0	10.0	6.0	7.5	0.6	11.0	11.0	7.0	7.5	0.6										
274	0.27	11.0	10.0	6.0	7.5	0.6															
334	0.33	11.0	10.5	7.0	7.5	0.6															
394	0.39	11.0	11.0	7.5	7.5	0.6															
474	0.47	11.0	11.0	7.5	7.5	0.6															
564	0.56	11.0	11.5	8.0	7.5	0.6															
684	0.68	11.0	11.5	8.0	7.5	0.6															
105	1.0	11.0	11.5	8.0	7.5	0.6															
155	1.5	11.0	12.5	9.0	7.5	0.6															