



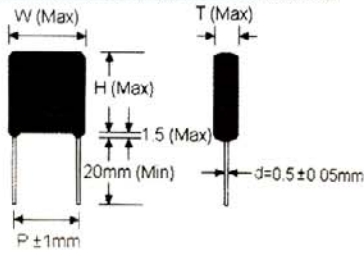

Polyester Film Capacitor

PEI Type: Inductive

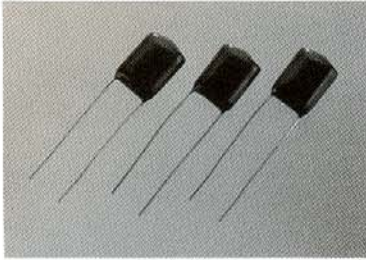

INTRODUCTION

1. HIGH MOISTURE RESISTANCE.
2. GOOD SOLDERABILITY.
3. AVAILABLE ON TAPE AND REEL FOR AUTOMATIC INSERTION.
4. LOW ESR.
5. SPACE-SAVING MINIATURE SIZE.

SPECIFICATION:

1. OPERATING TEMPERATURE : -40°C ~ + 85°C
2. CAPACITANCE RANGE : 0.001~0.47 μ F
3. CAPACITANCE TOLERANCE : \pm 5%(J), \pm 10%(K), \pm 20%(M)
4. RATED VOLTAGE : 50VDC/100VDC, 200VDC, 400VDC.
5. DISSIPATION FACTOR : 0.75% MAX AT 1KHz, 25°C
6. INSULATION RESISTANCE : >50000M Ω AT 25°C

Unit:mm

RV μ F	SIZE	50VDC/100VDC				200VDC				400VDC			
		W	H	T	P	W	H	T	P	W	H	T	P
0.001		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0012		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0015		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0018		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	8.0	12.0	4.0	4.0
0.0022		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0027		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0033		5.8	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0039		6.0	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	5.0	4.0
0.0047		6.5	10.5	3.5	4.0	7.0	11.0	4.0	4.0	9.0	12.0	6.0	4.0
0.0056		6.5	10.5	3.5	4.0	7.0	11.0	4.0	4.0	10.0	12.0	6.0	4.0
0.0068		6.5	10.5	3.5	4.0	7.0	11.0	4.0	4.0	10.0	12.0	6.0	4.0
0.0082		6.5	10.5	4.0	4.0	7.0	11.0	4.5	4.0	10.0	12.0	6.0	4.0
0.01		6.5	10.5	4.0	4.0	7.0	11.0	4.5	4.0	10.0	14.0	6.0	5.0
0.012		6.5	10.5	4.0	4.0	7.0	11.0	4.5	4.0	10.0	14.0	6.0	5.0
0.015		7.5	10.5	4.0	4.0	9.0	13.0	5.0	4.0	10.0	14.0	6.0	5.0
0.018		7.5	10.5	4.0	4.0	9.0	13.0	5.0	4.0	10.0	14.0	6.0	6.0
0.022		7.8	10.5	4.5	4.0	9.0	13.0	5.0	4.0	10.0	14.0	6.0	6.0
0.027		7.8	12.0	4.5	5.0	9.0	13.0	5.5	5.0	11.0	14.0	6.0	6.0
0.033		8.0	12.0	4.5	5.0	9.0	13.0	5.5	5.0	12.0	14.0	7.0	7.0
0.039		8.0	12.5	5.0	5.0	11.0	14.0	6.0	5.0	12.0	16.0	7.0	7.0
0.047		9.5	12.5	5.0	5.0	11.0	14.0	6.0	6.0	13.0	16.0	8.0	8.0
0.056		10.0	12.5	5.0	6.0	11.0	14.0	7.0	6.0				
0.068		10.0	12.5	5.5	6.0	12.0	14.0	7.0	6.0				
0.082		10.5	12.5	6.0	7.0	13.0	15.0	8.0	7.0				
0.1		11.5	13.0	6.5	7.0	14.0	15.0	8.0	7.0				
0.12		12.0	13.0	7.0	7.0	14.0	15.0	8.0	7.0				
0.15		12.0	15.0	7.0	7.0	15.0	17.0	8.0	7.0				
0.18		12.0	16.0	7.5	7.0	16.0	18.0	9.0	8.0				
0.22		12.0	16.0	8.0	7.0	18.0	18.0	10.0	8.0				
0.27		12.5	16.0	8.5	7.0								
0.33		13.5	17.0	8.5	8.0								
0.39		14.0	17.0	9.0	8.0								
0.47		15.0	17.0	10.0	8.0								