





Metallized Polypropylene Film Capacitor

PPS Type: For High Pulse/Large Current

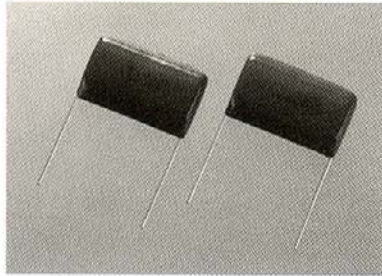

INTRODUCTION

1. LOW D.F.
2. INTERNALLY SERIES-CONNECTED.
3. SELF-HEALING PROPERTY.
4. SUITABLE FOR HIGH VOLTAGE, LARGE CURRENT/PULSE APPLICATION. e.g. CRT DEFLECTION TUNING CIRCUIT, ELECTRONIC BALLAST.

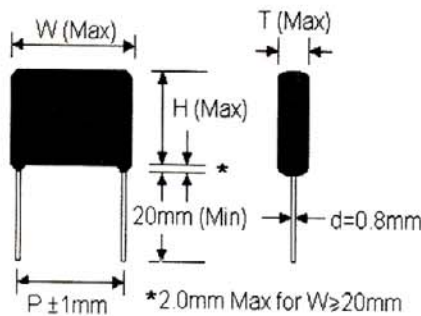

SPECIFICATION:

1. OPERATING TEMPERATURE : -40°C ~ + 85°C
2. CAPACITANCE RANGE : 0.001~0.033uF
3. CAPACITANCE TOLERANCE : ±2%, ±5%, ±10%
4. RATED VOLTAGE : DC 1000/1200V, 1500V/1600V, 2000V, 2500V.
5. DISSIPATION FACTOR : 0.08% MAX AT 1KHz, 25°C
6. INSULATION RESISTANCE : 100,000MΩ MIN
7. DIELECTRIC STRENGTH : 250% OF RATED VOLTAGE FOR 5 SEC

UNIT:mm

RV uF SIZE	1000/1200VDC				1500/1600VDC				2000VDC				2500VDC			
	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
0.001	25.0	13.0	7.0	21.0	25.0	13.0	7.0	21.0	25.0	14.0	8.0	21.0	25.0	16.0	9.0	21.0
0.0012	25.0	13.0	7.0	21.0	25.0	13.0	7.5	21.0	25.0	14.5	9.0	21.0	25.0	17.0	9.0	21.0
0.0015	25.0	13.0	7.0	21.0	25.0	14.0	7.5	21.0	25.0	15.0	9.0	21.0	25.0	18.0	10.0	21.0
0.0018	25.0	13.0	7.0	21.0	25.0	14.0	8.0	21.0	25.0	15.5	9.5	21.0	25.0	20.0	10.5	21.0
0.0022	25.0	13.5	8.0	21.0	25.0	14.5	8.5	21.0	25.0	17.5	10.0	21.0	25.0	21.0	11.5	21.0
0.0027	25.0	13.5	8.0	21.0	25.0	15.5	9.5	21.0	25.0	18.5	11.0	21.0	25.0	22.0	12.0	21.0
0.0033	25.0	14.0	8.0	21.0	25.0	16.5	10.0	21.0	25.0	19.5	11.5	21.0	32.0	20.0	13.0	27.5
0.0039	25.0	14.5	8.5	21.0	25.0	17.0	11.0	21.0	25.0	20.0	12.0	21.0	32.0	21.0	13.0	27.5
0.0047	25.0	15.0	9.5	21.0	25.0	18.5	12.5	21.0	32.0	18.0	11.0	27.5	32.0	22.0	14.0	27.5
0.0056	25.0	15.5	9.5	21.0	25.0	20.0	13.0	21.0	32.0	20.0	12.5	27.5	32.0	25.0	14.5	27.5
0.0068	25.0	17.5	11.0	21.0	32.0	17.0	10.0	27.5	32.0	21.5	14.0	27.5	32.0	27.0	16.0	27.5
0.0082	25.0	18.5	11.5	21.0	32.0	21.0	11.5	27.5	32.0	22.5	14.5	27.5	32.0	29.0	17.0	27.5
0.01	25.0	20.0	11.5	21.0	32.0	21.0	13.0	27.5	32.0	24.0	15.5	27.5				
0.012	25.0	22.5	13.5	21.0	32.0	22.5	13.5	27.5	32.0	25.5	17.0	27.5				
0.015	25.0	23.0	14.0	21.0	32.0	23.5	15.5	27.5								
0.018	32.0	22.0	11.5	27.5	32.0	25.0	16.5	27.5								
0.022	32.0	24.5	12.5	27.5	32.0	26.5	18.0	27.5								
0.027	32.0	27.0	14.0	27.5	32.0	29.5	19.0	27.5								
0.033	32.0	28.5	15.0	27.5	32.0	31.0	21.0	27.5								