

# Weekly Programmable Digital Electronic Timer



**PET-010**

Spend your valuable time with your family or love ones and leave the rest to our Z<sup>®</sup> Digital Programmable Timers. Our timers are easy to use and are designed for different applications, such as household appliances, business signs, and industrial machines.

In addition, our timers include:

- \* Lock function to lock-in your settings
- \* LCDs with backlights
- \* Back-up batteries for back-up in case of power failure
- \* EEPROM chips for reliable performance



**PET-900TB**  
**PET-901TB**  
**PET-902TB**



**PET-009**



**PET-900**



**PET-901**



**PET-902**

# MEGATONE ELECTRONICS

6F, 20, Sec. 2, Nanjing E. Rd., Taipei, 10470 Taiwan  
P.O. Box 55-775 Taipei  
TEL: +886-2-2562-8238  
FAX: +886-2-2562-8169  
E-Mail: [Orders@MegatoneCorp.com](mailto:Orders@MegatoneCorp.com)  
Website: [www.megatone.com.tw](http://www.megatone.com.tw)




## PET-009 \*Ni-Cd battery included


### Specifications:

Input Voltage	AC 110~120V 60Hz	AC 220~240V 50Hz	DC 24V
Resistive Load	15 AMP 1800 Watts	13 AMP 2850 Watts	15 AMP

### Dimension: (unit m/m)

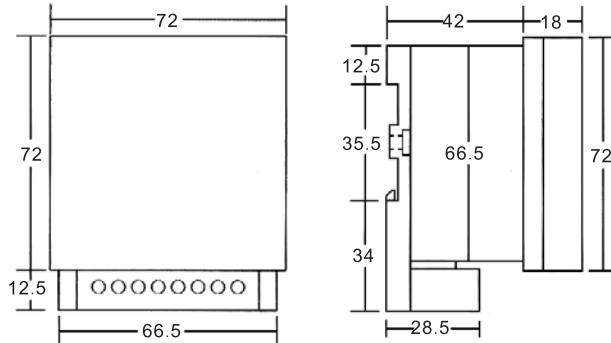

### Control Outputs and Connections:




## PET-010 \*Ni-Cd battery included


### Specifications:

Input Voltage	AC 110~120V 60Hz	AC 220~240V 50Hz	DC 24V
Resistive Load	15 AMP 1800 Watts	13 AMP 2850 Watts	15 AMP

### Dimension: (unit m/m)

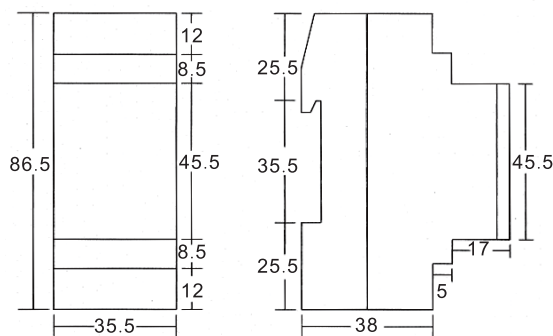

### Control Outputs and Connections:



\* Terminal 3 and 4 can be external with switch. When you need timer to be turned on at any time, you can turn on the switch. If you want to resume the pre-setting function, you have to turn off the switch of terminal 3 and 4.



## PET-900TB, PET-901TB, PET-902TB

Dimensions: (Width 156mm x Height 83mm x Depth 73mm)

	Full Timing Range	Rated Voltage	Rated Control Capacity	Reset Time	Reset System
PET-900TB	9999S 9999M 9999H	AC 110-120V (50 / 60 Hz)  AC 220-240V (50 / 60Hz)	AC 110-120V 15 AMP  AC 220-240V 10 AMP	0.1 second max	B Type: Manual Reset
PET-901TB	99.99S 99M 59S 99H 59M				
PET-902TB	99S → 99S 99M → 99M 99H → 99H ON    OFF				




## PET-900A(B), PET-901A(B)



## PET-902A(B)

	Full Timing Range	Rated Voltage	Rated Control Capacity	Reset Time	Reset System	Operating Temp.	Life
PET-900A(B)	9999S 9999M 9999H	AC 110-120V (50 / 60 Hz)  AC 220-240V (50 / 60 Hz)  DC24V	NO: 13A NC: 10A	0.1 second max	A Type: Power Reset  B Type: Manual Reset	-10°C to 50°C	Mechanical: 5 x 10 <sup>6</sup> times  Electrical: 10 <sup>5</sup> times
PET-901A(B)	99.99S 99M 59S 99H 59M						
PET-902A(B)	99S → 99S 99M → 99M 99H → 99H ON    OFF						

Dimension: (unit m/m)

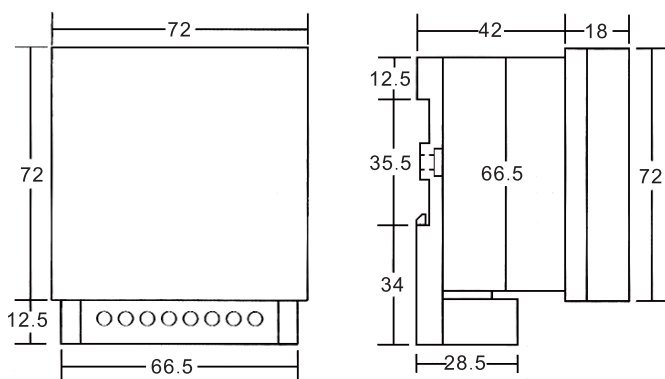

Control Outputs and Connections:

