


FEPC Core

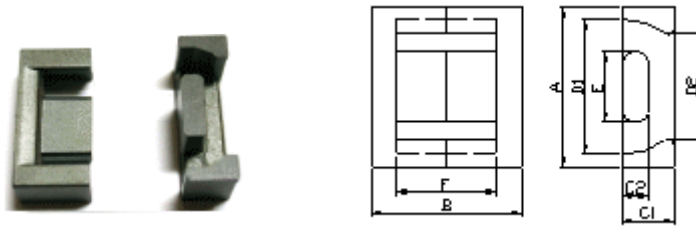

Type	DIMENSION (unit: mm)							
	A	B	C1	C2	D1	D2	E	F
FEPC13/13	13.3±0.3	13.2±0.4	4.6±0.15	2.05±0.1	10.5min	8.3min	5.6±0.15	9±0.4
FEPC17/17	17.6±0.4	17.1±0.4	6.0±0.15	2.8±0.1	14.3min	11.5min	7.7±0.15	12±0.4
FEPC19	19.1±0.5	19.5±0.4	6.0±0.2	2.5±0.1	15.8min	13.1min	8.50±0.2	14.5±0.4
FEPC25	25.1±0.5	25.0±0.2	8.0±0.2	4.0±0.1	20.6min	17.1min	11.5±0.2	18.0±0.6
FEPC27	27.1±0.5	32.0±0.4	8.0±0.2	4.0±0.1	21.6min	18.5min	13.0±0.3	24.0±0.6
FEPC30	30.1±0.5	35.0±0.4	8.0±0.2	4.0±0.1	23.6min	20.0min	15.0±0.3	26.0±0.6

Core set parameter and electrical characteristics

AL-Value(nH/N²):1KHz,0.25V,100Ts,25±3°C

Type	Le (mm)	Ae (mm ²)	C1 (mm ⁻¹)	Ve (mm ³)	Material				
					JPP-3	JPP-4	JPH-5	JPH-7	JPH-10
					AL	AL	AL	AL	AL
FEPC13/13	30.6	12.5	2.4	382.5	900	850			
FEPC17/15	37.6	22.8	1.6	857.3	1350	1250			
FEPC17/17	40.2	22.8	1.8	916.6	1250	1150			