


FET Core

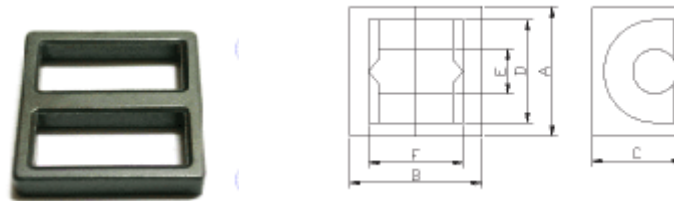

Type	DIMENSIONS (unit:mm)						
	A	B	C	D	E	F	H
FET20/20	20.10±0.40	20.10±0.40	4.40±0.20	15.70min	4.00±0.20	15.70min	2.00±0.20
FET24/24	24.20±0.50	24.20±0.30	4.00±0.30	19.00min	4.00±0.20	19.00min	2.40±0.15
FET28/28	28.45±0.50	28.45±0.50	5.00±0.30	22.20min	5.00±0.20	22.20min	2.90±0.15
FET35/35	35.30±0.60	35.30±0.60	7.50±0.30	26.50min	7.50±0.30	26.50min	4.00±0.20

Core set parameter and electrical characteristics

AL-Value(nH/N²):1KHz,0.25V,100Ts,25±3°C

Type	Le (mm)	Ae (mm ²)	C1 (mm ⁻¹)	Ve (mm ³)	Material				
					JPP-3	JPP-4	JPH-5	JPH-7	JPH-10
					AL	AL	AL	AL	AL
FET20/20	50.5	17.2	2.9	868.6			2150	3000	4300
FET24/24	60.8	17.5	3.5	1064.0			1800	2500	3600
FET28/28	71.1	26.8	2.7	1891.3			2350	3350	4700
FET35/35	86.8	57.9	1.5	5014.1			4200	5950	8400